




CUSTOMER		DIE / DETAIL #		UOM	QUANTITY	DIAMETER (D1)	

ROUND (C)	OBLONG (O)	RECTANGLE (R)	LONG LIFE (L)	FLATTED (F)	SHAPE*	LENGTH (L)	

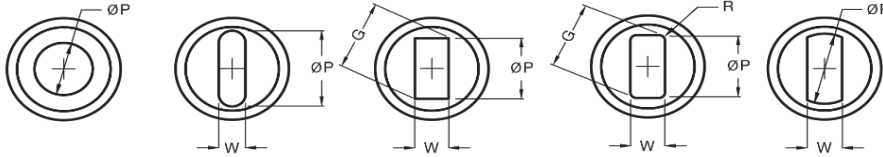

* See Tipco Catalog

HEAD TYPE (MT / TP)	HEAD EJECTOR (MTE / TE)	ULTIMATE (MTU / TUP)	ULTIMATE EJECTOR (MUE / TUE)	LOCATE METHOD TYPE*	LOCATE POSITION (DEGREE)*	W*	A*

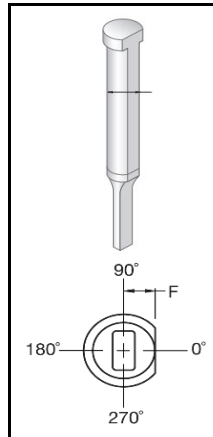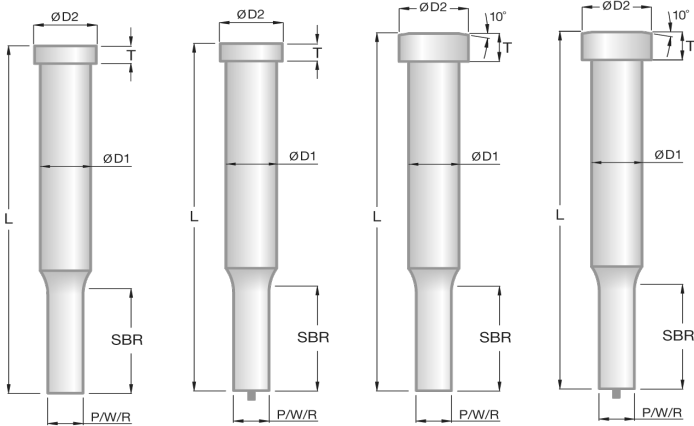

F (Depth)*

Z (Length)*

DOWEL SLOT DIAMETER*

SBR


B

ALTERATIONS (eg. Alt. Ejector; Shear)

HEAD DIA. (D2) **

HEAD LENGTH (T) **

BALL LOCK (MBL/MBH / BL/BH)	BALL LOCK EJECTOR (MBHE / BHE...)	KNOB (MBHK / BHK)	KNOB EJECTOR (MBHEK / BHEK)

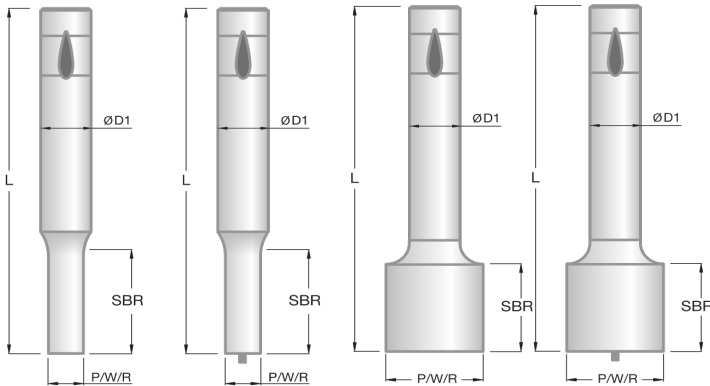

View Through Shank


Locate Methods

- SF = Single Flat
- DF = 2x Flat
- FLF = Full Flat
- DS = Dowel Slot

COATING TYPE

BALL-LOCK TYPE

Heavy Duty (HD)	Light Duty (LD)



BS LOCATION

ETCHING INSTRUCTIONS

MATERIAL**

ADD. ALTERATIONS (eg. Alt. Ejector; Shear)

Ex.:	MAT.	TYPE	SHAPE	DIA.	LENGTH	P / W / R	SBR	LOCATE DETAILS	COAT
	M2	MT	O	16	125	P10.0 W8.0	25	SF @ 90°	TiN

** If not standard (see Catalog)